


Estimating Your Siding Materials

Siding:

By using the drawings below measure the height and width of wall. Enter total on materials Required Form (page 6)


Wall Areas:

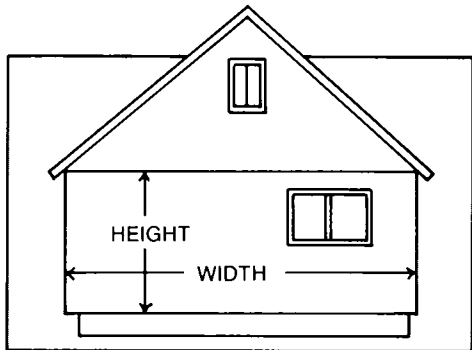

Measure height (excluding gables). Measure width to include doors and windows.

_____ ft height x _____ ft width = _____
 Repeat for all walls. square ft


Gable Areas:

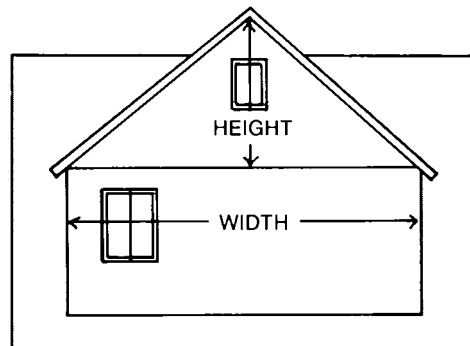

Measure height at center plus 12" for waste. Measure width to include windows

_____ ft height x _____ ft 1/2 width = _____
 Repeat for remaining gable. square ft

Gambrel Roof House:

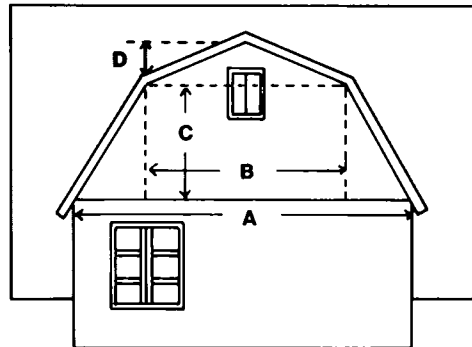


Measure the gambrel roof house as shown above to include windows and doors. Then process with the following calculations:

$1/2 (A + B) \times C =$ _____ square ft
 $B \times 1/2 D =$ _____ square ft

Total area: _____
 Repeat for all gambrel areas

Gambrel Roof House:

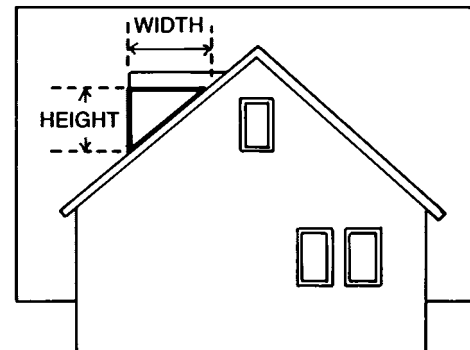

Measure height of dormer plus 12" for waste

_____ ft 1/2 height x _____ ft width = _____ square ft

_____ dormer area 1 side x 2 = _____ square ft
 Repeat for all dormers per dormer

Estimating Your Siding Materials

Siding Materials Required

Walls	_____ square feet
Gable ends	_____ square feet
Dormer sides	_____ square feet
Gambrel walls	_____ square feet
Total wall area	_____ square feet
Subtract areas not to be covered such as garage doors Or sliding glass doors	(- _____) square feet
Total net area	_____ square feet
Total net square foot area ÷ 100	_____ number squares of siding required

Siding Accessories:

Starter strip STEEL SSV	_____ lineal feet
J-Channel 3/4* SE12P	_____ lineal feet
J-Channel 1-1/8' SE18P	_____ lineal feet
Outside corner post 1-1/8" SOCP 1-1/8TP	_____ lineal feet
Outside corner post 3/4" SOCP 3/4TP	_____ lineal feet
inside corner post 1-1/6" SICTP	_____ lineal feet
8" individual Corner SICTP	_____ Number Pieces required
Backer taps SB20	_____ Number Pieces required
Undersill trim SUSMP	_____ lineal feet
Trim Coil 18" x 50'	_____ lineal feet
Small head galvanized nails (1-1/2' minimum size) (Total square feet of siding x .01)	_____ pounds required

Measuring Accessory Needs

J-Channel:

Measure in lineal feet around doors, windows, where dormer meets roof line or under eaves.

Starter Strip:

Measure along base of house.

Outside and Inside Corner Posts:

Measure the length of the corners.

Undersill Trim:

Measure above and below windows, above doors and where siding meets eaves.

Individual Corners:

Measure length of all outside corners and divide by 6".

Backer tabs:

Approximately two to three tabs may be needed per 8' horizontal siding panel or approximately 36 per siding square.

Note. Add 10% to all measurements for waste.